




HomeControl Flex Installation: TG-SCI with Simon XT/XTi

The following information is to serve as a guide for installations of TG-SCI devices enabled for Interactive Services with the Simon XT/XTi. The configuration shown in the diagram below is an example of how a proper installation will look.

Installation Diagram

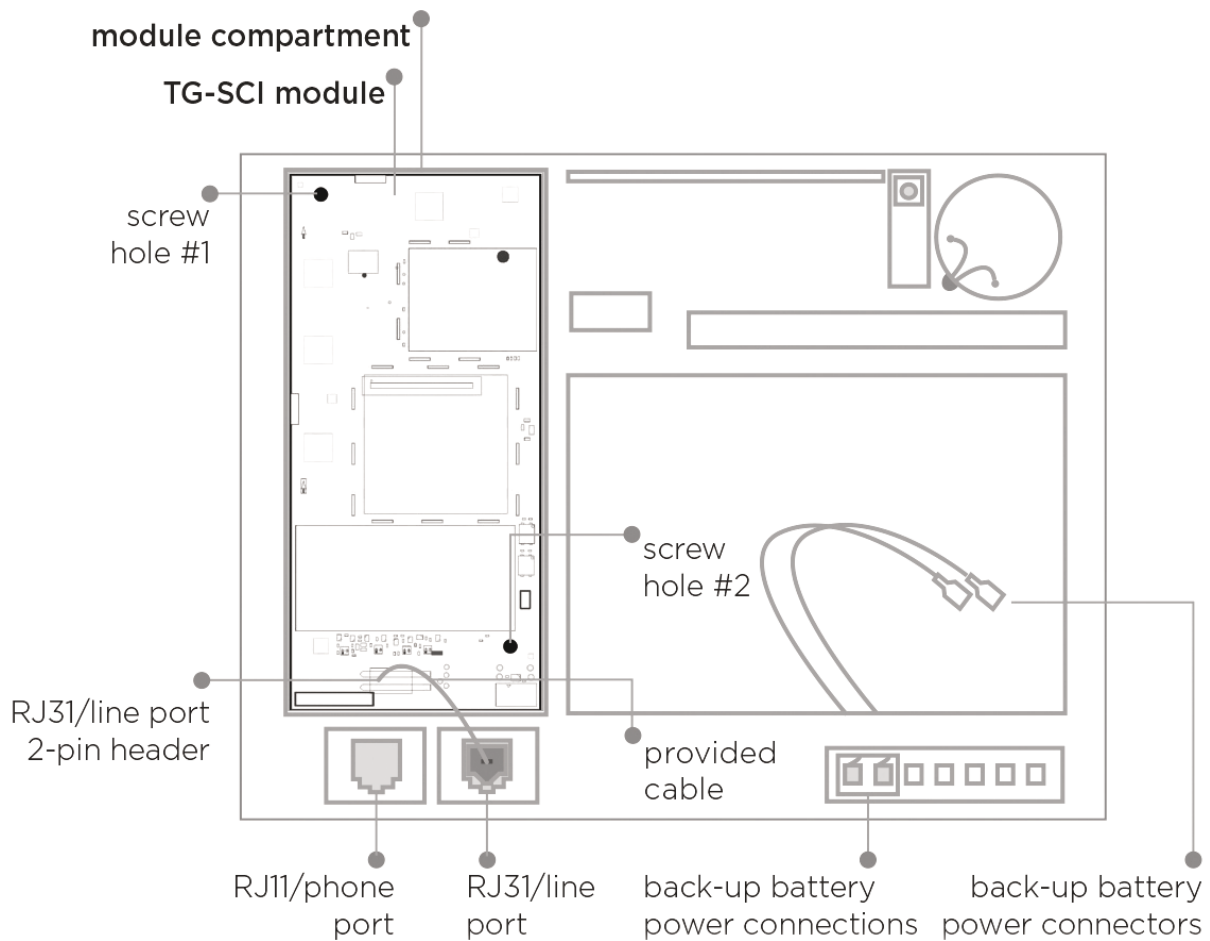

Note: Although the TG-SCI radio module will work with various panels, Interactive Services is only available when the module is used within the Simon XT or Simon XTi alarm panels.



Programming Steps

After getting into programming mode, check/do the following:

Set to Contact ID:

Keypad Display	Enter on Keypad	Comments
Select _____	Reporting	Program Alarm Format.
Select _____	COMM Modes	To access alarm communication modes.
Phone 1 Report Mode	All CID	Sets all alarm/nonalarm events to report in CID format on phone #1. Press 'Save' to save mode and return to previous screen.
Select _____	x Close	To get back to main menu.

Disable Unvacated Premises Feature:

Keypad Display	Enter on Keypad	Comments
Select _____	Timers	Program Panel Timers.
Unvacated Premises	✓	Disables unvacated premises to allow remote arming in the away state.
Select _____	x Close	To get back to main menu.

Technical Note

The Simon XT and XT_i keypad interface utilizes a one button arming design. This causes the HomeControl Flex keypad arming notifications to display as randomized users that are programmed in the Access Codes Menu of the panel.

Reference Note

For more detailed TG-SCI installation and programming instructions, please refer to the TG-SCI installation guide.